


六角ナット (付属書) 平径 / 高さ

(ISO 4032~4036及びISO 8673~8675によらない六角ナット) JIS B 1181:2009より抜粋

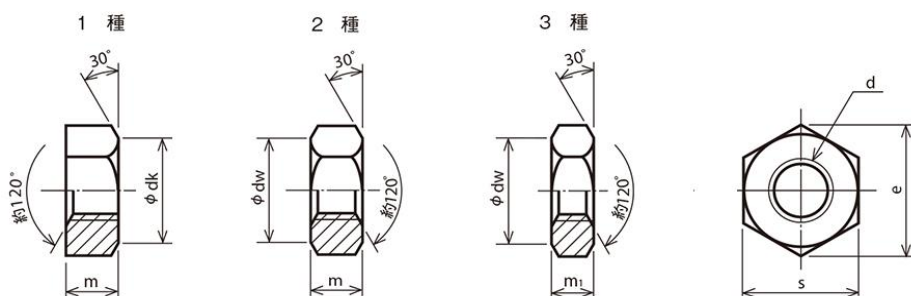

ミリ単

ねじの呼び		m		m1		s		e	φdw・φdk'
並目	細目	基準寸法	許容差	基準寸法	許容差	基準寸法	許容差	約	約
M2	-	1.6	0	1.2	0	4	0	4.6	3.8
●M2.5	-	2		1.6		5		5.8	4.7
M3	-	2.4	-0.25	1.8	-0.25	5.5	0	6.4	5.3
●(M3.5)	-	2.8		2		6		6.9	5.8
M4	-	3.2	0	2.4	0	7	-0.20	8.1	6.8
M5	-	4		3.2		8		9.2	7.8
M6	-	5	-0.30	3.6	0	10	0	11.5	9.8
●(M7)	-	5.5		4.2		11		12.7	10.8
M8	M8X1	6.5	0	5	-0.25	13	-0.25	15	12.5
M10	M10X1.25	8		6		17		19.6	16.5
M12	M12X1.25	10	-0.36	7	0	19	0	21.9	18
(M14)	(M14X1.5)	11		8		22		25.4	21
M16	M16X1.5	13	0	10	-0.36	24	-0.35	27.7	23
(M18)	(M18X1.5)	15		11		27		31.2	26
M20	M20X1.5	16	-0.43	12	0	30	-0.40	34.6	29
(M22)	(M22X1.5)	18		13		32		37	31
M24	M24X2	19	0	14	-0.43	36	0	41.6	34
●(M27)	(M27X2)	22		16		41		47.3	39
M30	M30X2	24	-0.52	18	0	46	-0.45	53.1	44
●(M33)	(M33X2)	26		20		50		57.7	48
M36	M36X3	29	0	21	-0.52	55	0	63.5	53
●(M39)	(M39X3)	31		23		60		69.3	57
M42	-	34	0	25	-0.62	65	-0.45	75	62
●(M45)	-	36		27		70		80.8	67
M48	-	38	-0.62	29	0	75	-0.55	86.5	72
●(M52)	-	42		31		80		92.4	77
M56	-	45	0	34	-0.62	85	0	98.1	82
●(M60)	-	48		36		90		104	87
M64	-	51	0	38	-0.74	95	-0.55	110	92

●印は、一般に市場品として在庫が少ないものになります。